
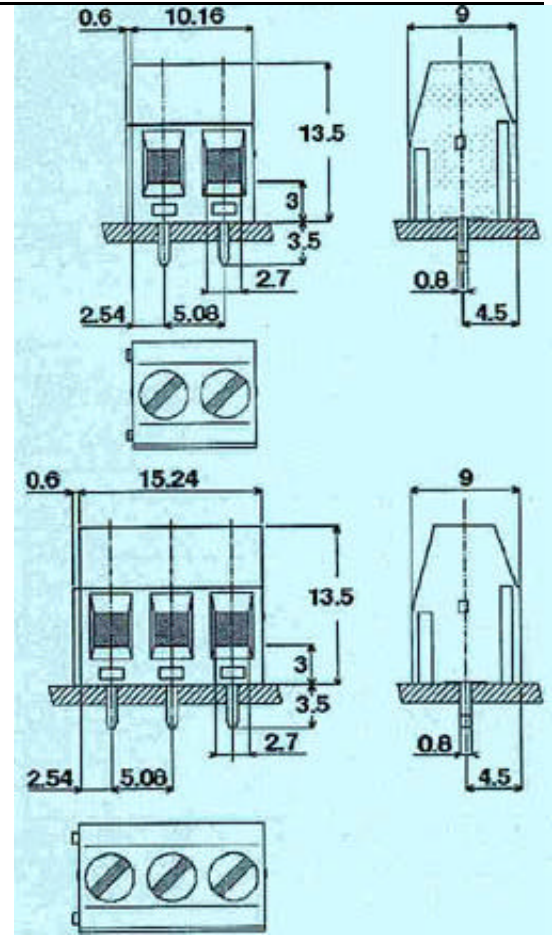


Series 155 200 Terminal Block

- ❑ Low Profile PCB Terminal Block, Screw and Wire Perpendicular.
- ❑ 20-14 AWG, 16 Amp, 300V
- ❑ Center to center pin spacing: .200"/5.08mm
- ❑ Wire and screw perpendicular
- ❑ UL, CSA approved and VDE rated
- ❑ Flammability Rating UL 94VO
- ❑ Number of Poles: 2-3 Dovetail Interlocking.

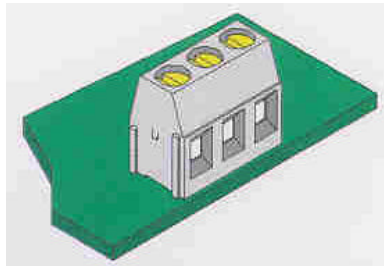

Dimensional Data

Center to Center Spacing (P)	.200" / 5.08mm
Number of positions (N)	2-3
Captive screws	M3
Blade of screwdriver	.138" x .20" / 3.5mm x 0.5mm
Recommended tightening torque	.45 mN
Insulation stripping length	.236" / 6mm
P.C.B Thickness	.063 - .094" / 1.6mm – 2.4mm

Technical Data

Pin (Plating)	Sn
Screw-clamp (plating)	Nickel
Housing	-PA UL94 V O
Operating temperature	-22°F + 212°F / - 30°C + 100°C
Insulation resistance	≥ 10 ¹⁰ Ω

Electrical Characteristics

	UL	CSA	NFC-UTE	DIN-VDE
Wire range (solid or stranded)	20-14 AWG	20-14 AWG	2.5 mm ²	2.5 mm ²
Maximum current rating (+ 68°F / + 20°C)	16A	16A	16A	16A
Operating voltage rating	V≈ 300	300	250 C cat.	250 C gr.
Dielectric withstand	V≈ 2500	2500	2500	2500
Flammability	94 V O			